

Panel light 面板灯

- . Made of aerometal, super sturdy and corrosion-resistan
- . Outstanding outline without screws
- . Introduction anti-glare diffuser from America and Mitsubishi LGP
- . UGR<16
- . High transmittance and uniform lighting
- . With advanced thermal management, excellent heat dissipation in the back and front of the panel to guarantee the consistency of color temperature and longer life span.

TD 面板灯，采用顶级航空铝灯体，外观精致，无螺丝，美国进口防眩光扩散板，日本三菱导光板，透光率高，出光均匀，UGR < 16，先进的热管理技术，正面背面同时散热使灯具温度得以更好的控制，保证了灯具的寿命及色温的一致性。




Product Profile

- . Made of aerometal, super sturdy and corrosion-resistan
- . Outstanding outline without screws
- . Introduction anti-glare diffuser from America and Mitsubishi LGP
- . UGR<16
- . High transmittance and uniform lighting
- . With advanced thermal management, excellent heat dissipation in the back and front of the panel to guarantee the consistency of color temperature and longer life span.

Luminescence Ratio



Direct 100%

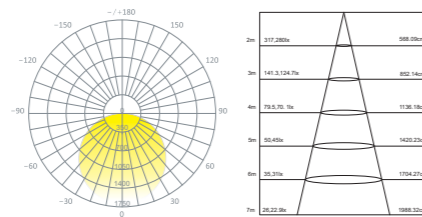

Parameter list

CRI	CCT	SDCM	UGR	Voltage	Frequency	Operation	IP Protection	Environment used	Luminous angle (Average beam angle)
90+	4000K	≤ 3	16	220-240V	50/60Hz	-35°C ~45°C	IP20	Indoor	150°

Product	Part number	Lumen	Color	Power	Efficacy	Opening size	Dimension	Installation	Light Distribution
面板灯 Panel light	GM669-D59530W030A-A	3000LM	○	30W	100lm/W	596*596 mm	598*598*10 mm		
	GM669-D59540W040A-A	4000LM	○	40W	100lm/W				





德国工业设计

GLEMING Offices

Germany
Boschstr. 7
56288 Kastellaun
Call: +49-6545-912261
E-mail: info@gleming.de

China
Building #8, Changfeng Industrial Park, Dongkeng
Gongming Town, Guangming New District
Shenzhen, Guangdong, China
Call: +86-755-2999 7899 Fax: +86-755-2999 7866
E-mail: sales.china@gleming.com
www.glemingchina.cn