

Archiline 阿奇尔

Archiline achieves a unique aesthetic effect, and people-orientedly lightens the international premium shaping of Gleming's German industrial design. Combining unique design aesthetics and human-centered lighting, it floats in the air like magic. The 15mm height is very flat, and the soft light is adjustable by light brightness and color temperature. The light sensor automatically adjusts to a comfortable light according to the daylight process of spring, summer, autumn and winter surroundings. The color temperature and brightness of the light can be controlled through the APP. The 10-second switch brings a gradual and soft light that occurs to people unknowingly. The 4:6 indirect and direct light makes the whole light better and more comfortable.

阿奇尔获得了独特的美学效果，以人为本点亮了 Gleming 德国工业设计的国际溢价塑造。结合了独特的设计美学和人类中心照明，犹如魔术似的漂浮在空中，15mm 高度非常平坦，柔和的光线具有可调光亮度可调节色温，光感应遵循春夏秋冬的日光过程自动调适舒适的灯光环境。所有功能可以通过 APP 操作灯光的色温与亮度，10 秒的开关带来渐变柔和的灯光在人们不知不觉时发生，上下发光 4:6 令到整个灯光效果更佳舒适。




**Ultra slim unbelievable flat
Aesthetic design**

The ultra-slim LED pendant light combines unique design with groundbreaking lighting, control technology and a intuitive operating concept. Due to the right functionality, Archiline could be used for every application - no matter in foyers, offices, clinics, hotels, restaurants or private living worlds.

Aesthetic design

It could serve as an excellent decorative element besides providing light for interior architectures

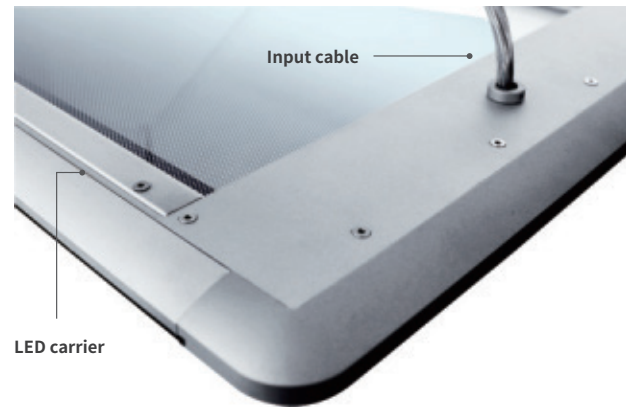

Functional & Smart

With Archiline CASAMBI module, it is possible to tablet the light infinitely from 100% to 0% via bluetooth. The CASAMBI wireless push-button XPress is optional. Up to 4 lights can be switched and dimmed independently.



Material and surface


Best choice of materials with a premium top coat surface for a high value, functionality and long Lifespan.

OPTIC with embossed microprisms.

Top cover scratch-resistant coated

Silk screen PMMA scratch-resistant coated

Aluminum frame blasted and natural anodized.

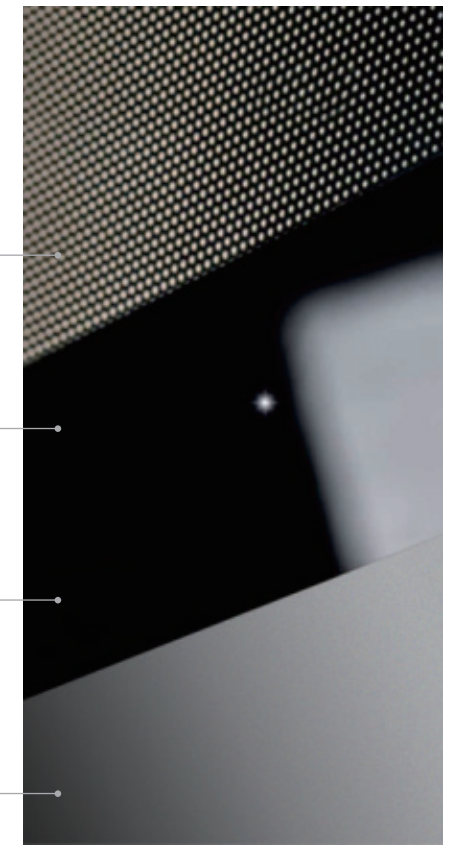

Accessory



Cord Suspension Kit 1.8 meters



Casambi PIR motion & Daylight sensor




Casambi Remote controller




Product Profile

- . Flicker-free, visual comfort
- . Uniform illumination, direct and direct light
- . Outstanding glare control
- . Modernization design, ideal for office and education lighting
- . Support human centric lighting control, blue tooth control
- . Support tunable CCT, presence & daylight sensor

Luminescence Ratio



Indirect/Direct
40%/60%

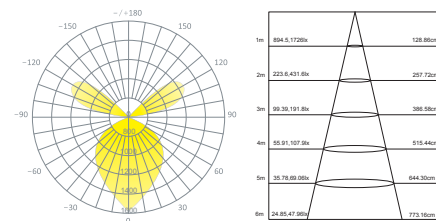

Parameter list

CRI	CCT	SDCM	UGR	Voltage	Frequency	Operation	IP Protection	Environment used	Efficacy	Luminous angle (Average beam angle)
90+	4000K	≤ 3	19	220-240V	50/60Hz	-35°C ~45°C	IP20	Indoor	90lm/w	Up150° / Down120°

Product	Part number	Lumen	Color	Power	Dimension	Installation	Luminescence Ratio
---------	-------------	-------	-------	-------	-----------	--------------	--------------------

阿奇尔
Archiline


GM710-D31370W070A

7000LM

●

78W

1325*365*15mm







德国工业设计

GLEMING Offices

Germany
Boschstr. 7
56288 Kastellaun
Call: +49-6545-912261
E-mail: info@gleming.de

China
Building #8, Changfeng Industrial Park, Dongkeng
Gongming Town, Guangming New District
Shenzhen, Guangdong, China
Call: +86-755-2999 7899 Fax: +86-755-2999 7866
E-mail: sales.china@gleming.com
www.glemingchina.cn